


---

# INSPECTION HATCHES MADE OF SHEET METAL LACQUERED WHITE



METALSTAMPI

**INSPECTION HATCHES  
WHITE BOX  
MADE OF SHEET METAL PAINTED WHITE**

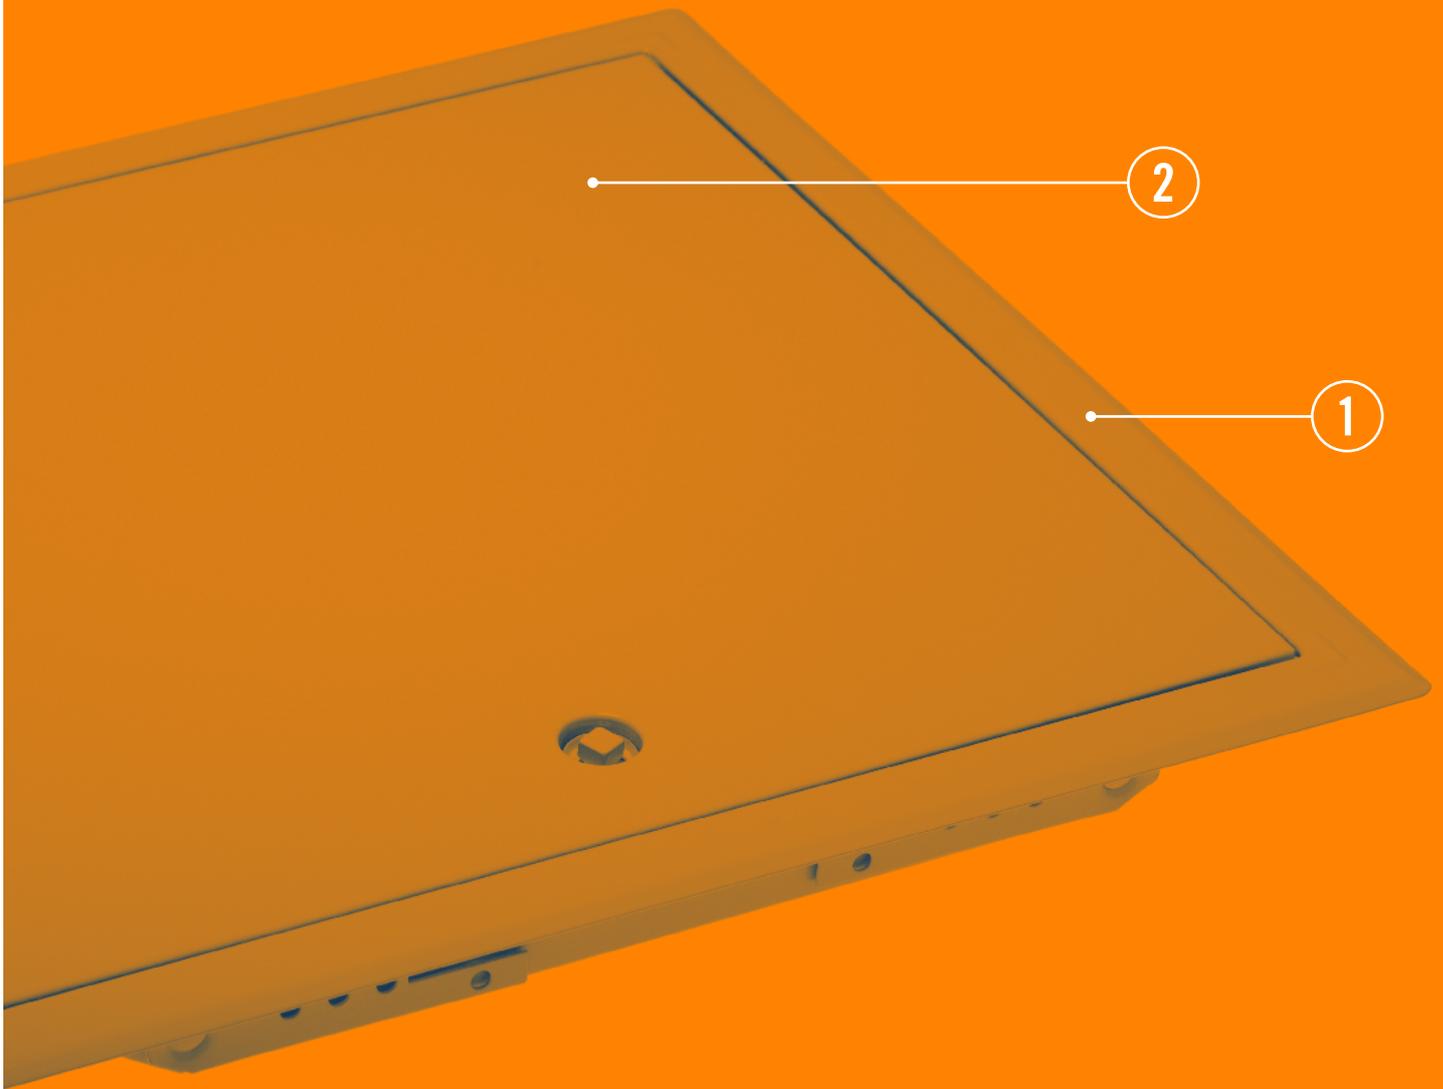

## STRENGTHS


- 1 — Visible surfaces.
- 2 — RAL 9016 white lacquered surface finish.
- 3 — Applicable on covering thickness of 12.5-15-25 mm.
- 4 — Removable door with rotating opening.




# INSPECTION HATCHES MADE OF SHEET METAL PAINTED WHITE

## STANDARD S=12,5 - 15 - 25


Item	Description	Dimension and thickness	Weight per package	Application	Sales unit
	inspection hatch made of sheet metal painted white, rotates to open, removable door	net clearance LxL s 12.5-15-25		suspended ceiling wall	
<b>BW00200200</b>		200x200	0.54		1 piece
<b>BW00300300</b>		300x300	1.10		1 piece
<b>BW00400400</b>		400x400	1.60		1 piece
<b>BW00500500</b>		500x500	2.80		1 piece
<b>BW00600600</b>		600x600	3.80		1 piece

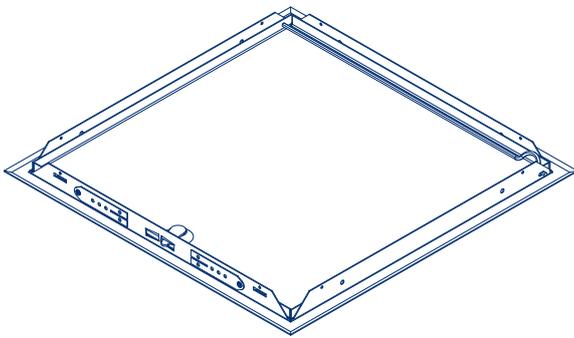


axonometric view (closed) scale 1:10

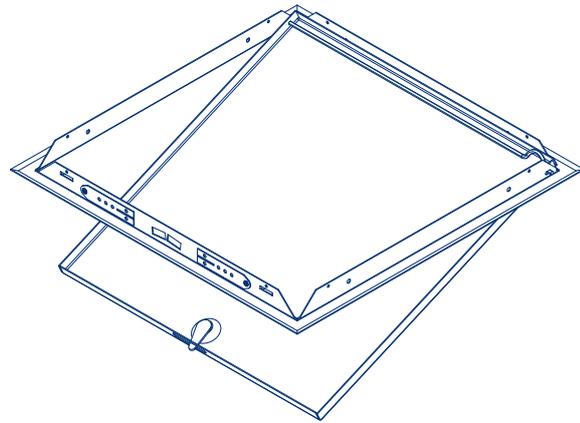

axonometric view (opened) scale 1:10

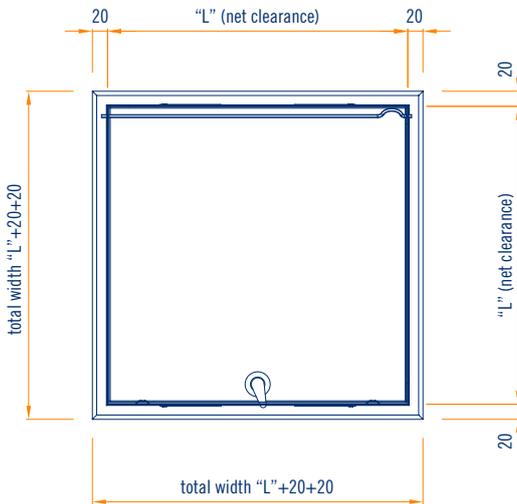

plan view (closed) scale 1:10

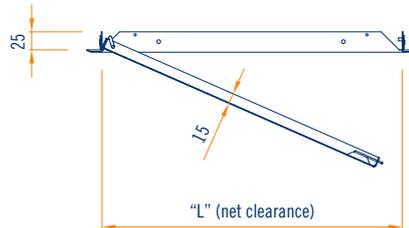

section (opened) scale 1:10

# IMPORTANT RECOMMENDATIONS FOR USING AND STORING PRODUCTS

## CE Marking

Please note that each product is part of a hanging/connection kit for connecting to the upper anchoring system and to the supporting element in dry construction systems **for use inside buildings**. The various components are identified in the catalogue and price list with the CE logo.

**Each CE product has a Declaration of Performance (DOP).**

**Durability: class B** (Components of a building exposed to variable relative humidity up to 90% and to variable temperatures up to 30°C but with no exposure to corrosive pollution agents).

## Recommendations for storing metal framing elements

We recommend to store packages in a covered area with a relatively dry atmosphere and as constant a temperature as possible, to avoid condensation that could consume the passivation coat protecting the galvanised surface.

If stored outdoors (**not recommended**), please cover so as to ensure the material is fully protected against adverse weather conditions (rain, fog, snow), making sure the packages are stored in a slightly inclined position. The cover must nevertheless ensure sufficient airflow (the two surfaces must not be in direct contact) so that moisture does not settle and create condensation.



**Metalstampi s.r.l.**

Vicolo Biban, 7

31030 Biban di Carbonera (TV) Italy

Tel. +39 0422 398250

[export@metalstampi.com](mailto:export@metalstampi.com)

[www.metalstampi.com](http://www.metalstampi.com)